

SARSILMAZ




SAR 762 MT-D

MAKİNELİ TÜFEK / MACHINE GUN

TEKNİK VERİ (TECHNICAL DATA)

KALİBRE (CALIBER)	7.62 x 51 mm NATO
ÇALIŞMA SİSTEMİ (OPERATING PRINCIPLE)	GAZ TAHRİKLİ, MEKANİZMASI AÇIK POZİSYONLU (GAS OPERATED, OPEN BOLT)
BESLEME (AMMUNITION FEED)	MAYON (M13) (BELT FEED M13)
ATEŞLEME MODU (MODES OF FIRE)	EMNİYET, SERİ ATIŞ (SAFETY, FULL AUTO)
TETİK AĞIRLIĞI (TRIGGER PULL)	50-80 N
ATIM SAYISI (RATE OF FIRE)	1. KONUM 550-650 ATIM/DK. (550-650 RND/MIN AT 1. POS.) 2. ve 3. KONUM EN AZ 600 ATIM/DK. (min. 600 RND/MIN AT 2 and 3 POS.)
DAĞILIM (ACCURACY)	5 MOA
ETKİLİ MENZİL (EFFECTIVE RANGE)	1100 m
YİV-SET (RIFLING)	4 SAĞ 304,8 mm (4 RH 1:12")
NAMLU ÇIKIŞ HIZI (MUZZLE VELOCITY)	850 m/s (±15 m/s)

REV:0 - 29/09/2023

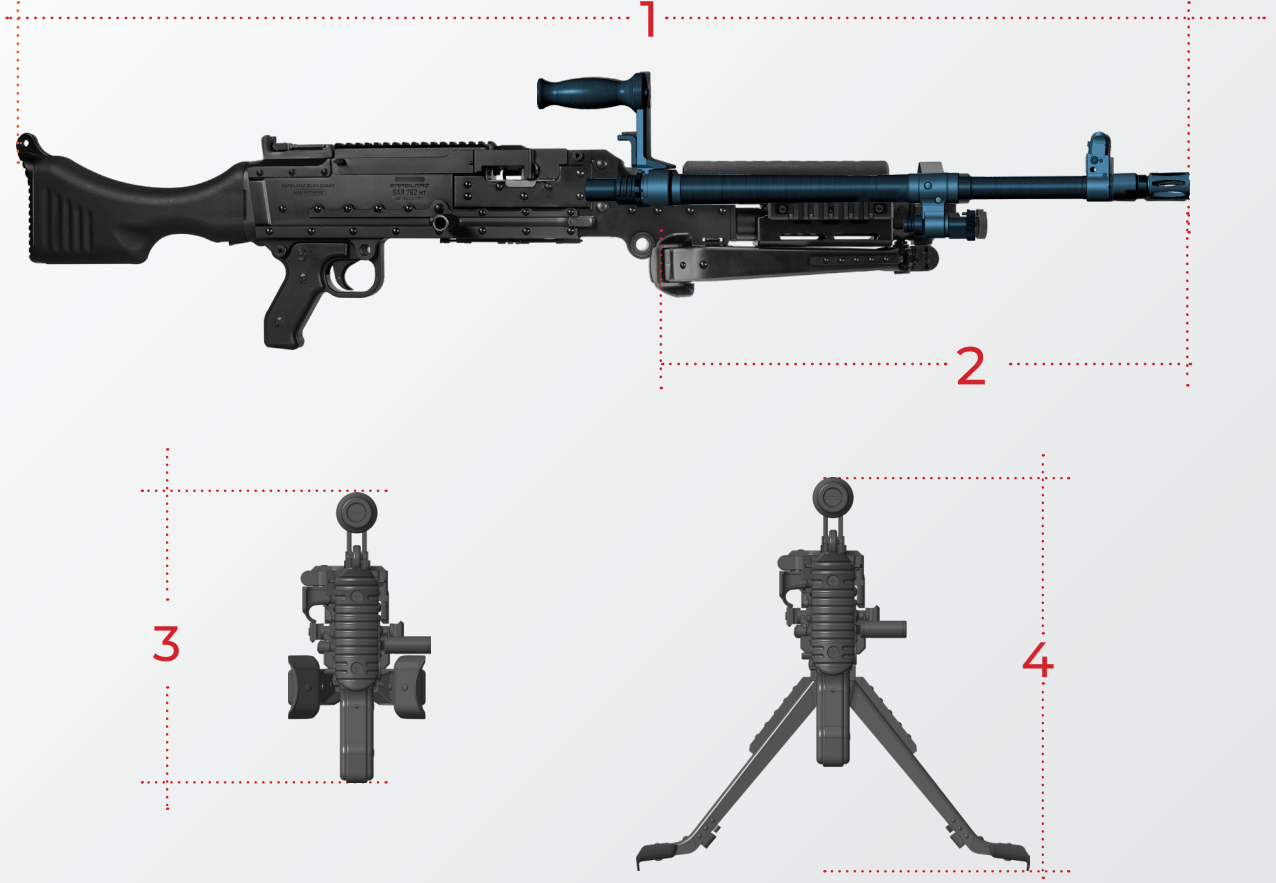

EBATLAR (DIMENSIONS)

1- SABİT DİPÇİK UZUNLUK (FIXED STOCK LENGTH)	1235 mm (± 10 mm) 48.6"
2- NAMLU UZUNLUĐU (BARREL LENGTH)	548 mm (± 3 mm) 21.6"
3- AKSESUARSIZ YÜKSEKLİK (WITHOUT ACCESSORIES HEIGHT)	280 mm 11" (± 10 mm)
4- AKSESUARLI YÜKSEKLİK (ACCESSORIES HEIGHT)	390 mm (± 10 mm) 15.4"

AĐIRLIKLAR (WEIGHTS)

AKSESUARSIZ AĐIRLIK (WITHOUT ACCESSORIES WEIGHT)	10950 g (± 150 g) / 386.2 oz
AKSESUARLI AĐIRLIK (ACCESSORIES WEIGHT)	12250 g (± 150 g) 432.1 oz

GENEL ÖZELLİKLERİ (GENERAL FEATURES)

- 3 KADEMELİ GAZ VALFİ (GAS VALVE 3 POSITIONS)
- OPSİYONEL ATIŞ MODLU TETİK (OPTIONAL SELECTABLE FIRE)
- HIZLI DEĐİŐTİRİLEBİLEN NAMLU (QCB)
- MODULER RAY (PICATINNY RAIL)
- KOAKSİYEL BAĐLANTI (COAXIAL MOUNTED)
- PLATFORM ve PİYADE KULLANIMI (PLATFORM and INFANTRY USE)

REV:0 - 29/09/2023

SARSILMAZ SİLAH SANAYİ A.Ő.
Düzce 1. Organize Sanayi Bölgesi
5. Cadde No:12 Beyköy Beldesi
Düzce / TÜRKİYE

TELEFON:
+90 (380) 548 8011
FAKS:
+90 (380) 548 85 63

E-MAIL:
sarsilmaz@sarsilmaz.com



sarsilmaz.com

